

GROUP 4

CORROSION PROTECTION

CONTENTS

BODY SEALING LOCATIONS.....4-2

UNDERCOAT APPLICATION LOCATIONS
.....4-6

BODY SEALING LOCATIONS


M40400000010USA0000010000

If the sealant application is directly visible on the outer plate and requires appearance quality of the application in areas such as the drip rail, pillar, clinch and so on, then apply the sealant so that it is flat, or

wipe off any excess mounding after the application. Be careful not to obstruct the water draining hole.


NOTE: The bold dotted line indicates the application area on the underside.

FLOOR

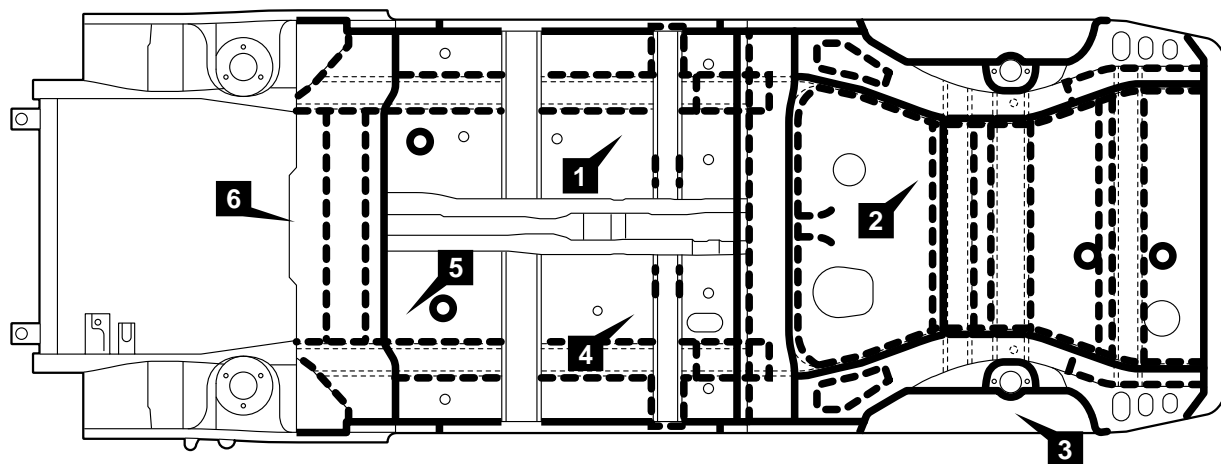


ZB5003450000

UPPER BODY


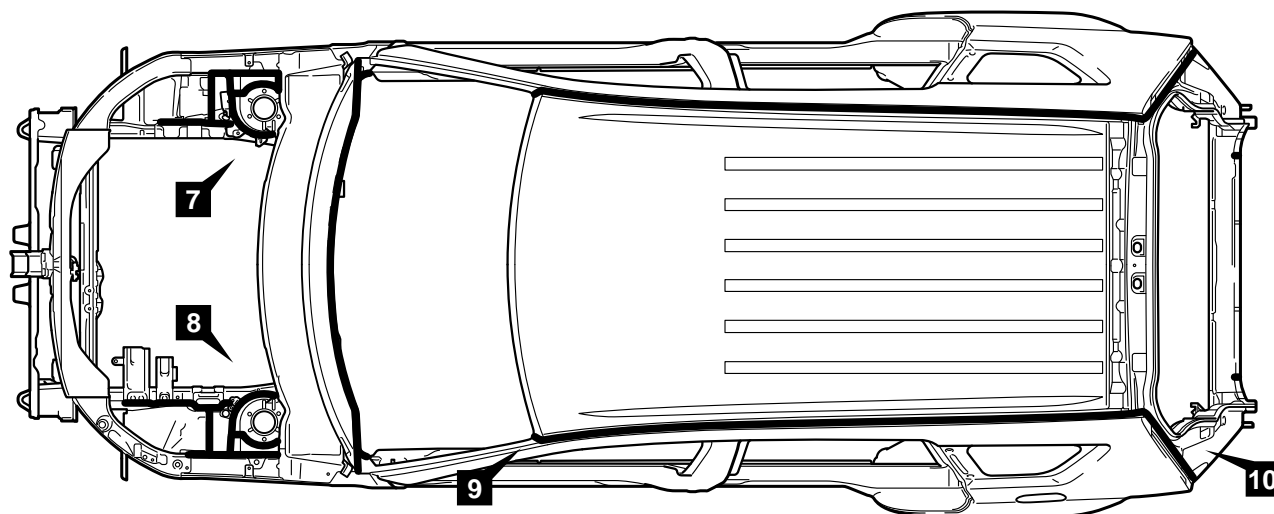


ZB5003460000


SIDE BODY

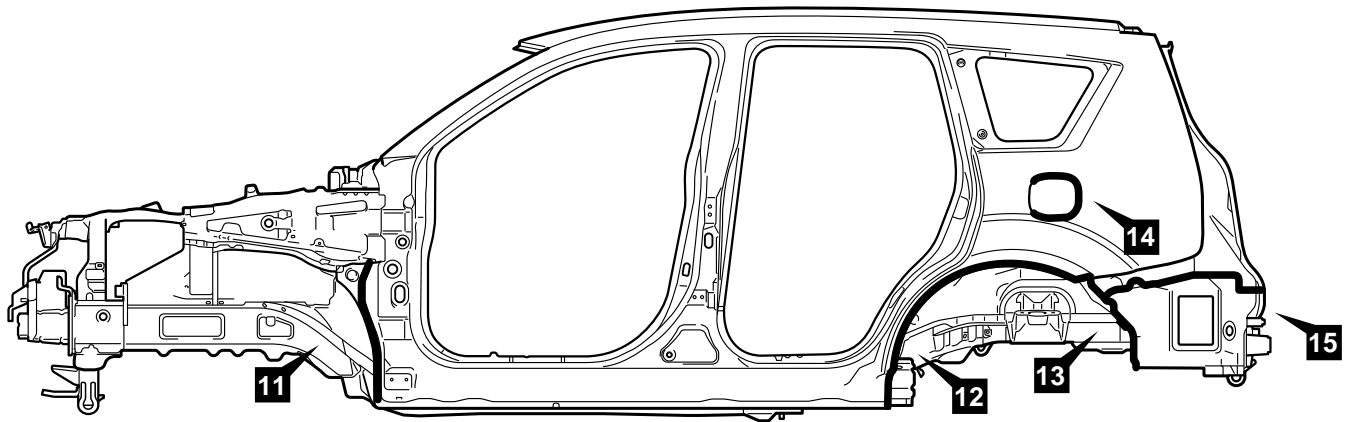






ZB5003470000





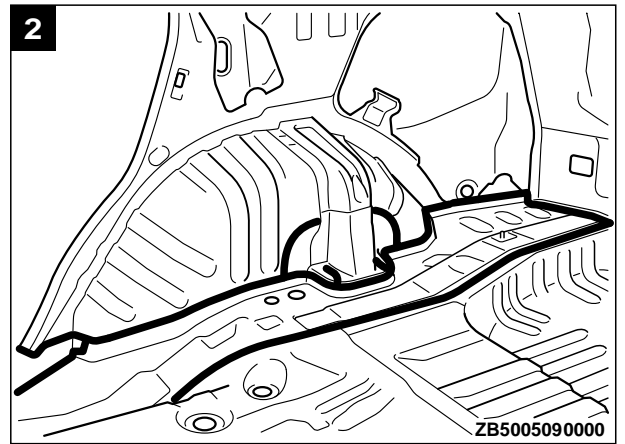
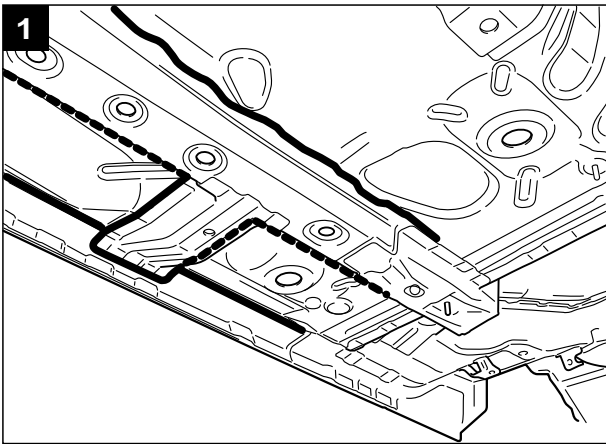




ZB5005090000

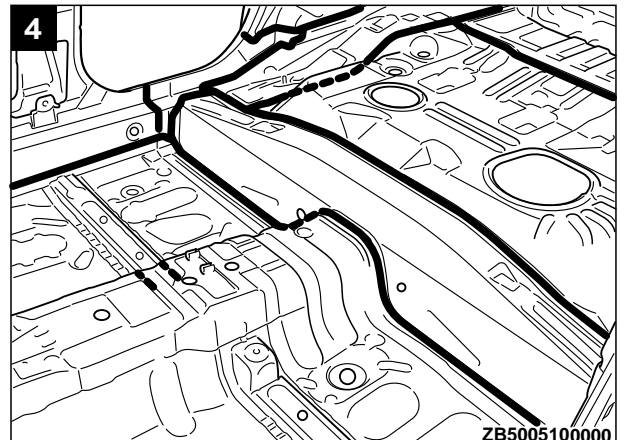



ZB5005100000

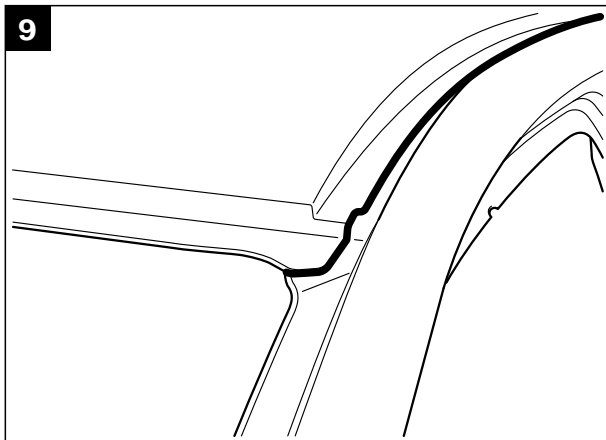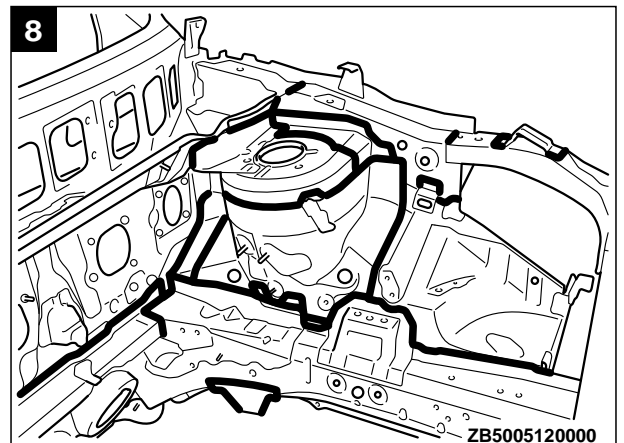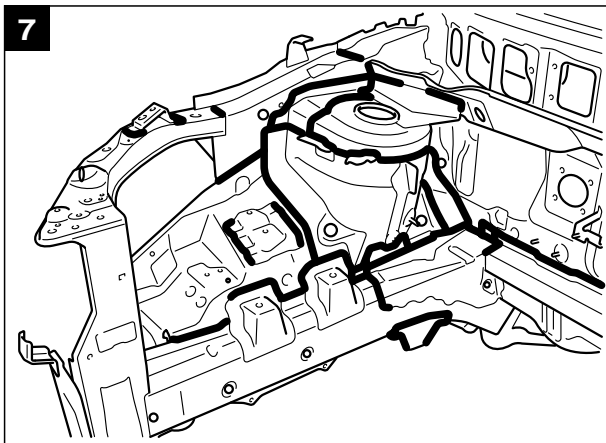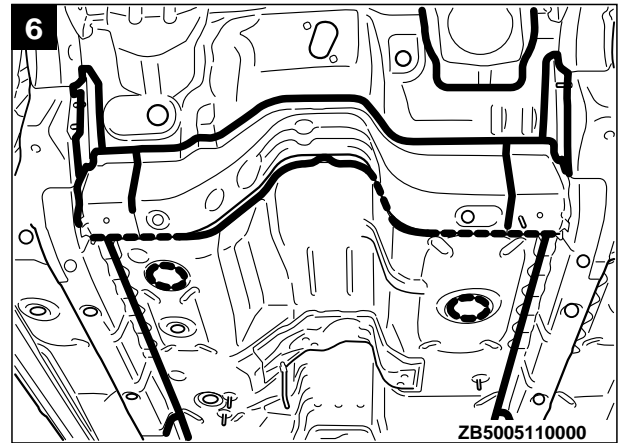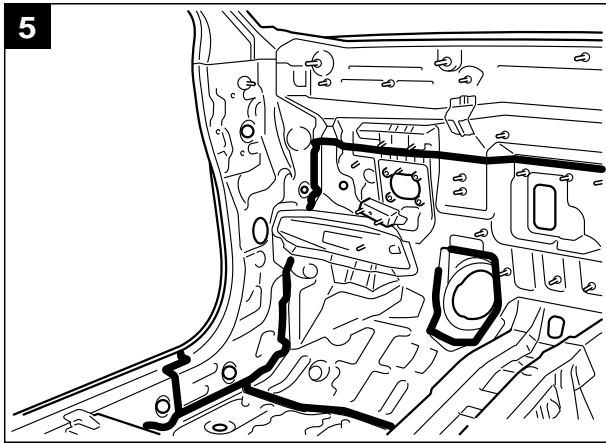

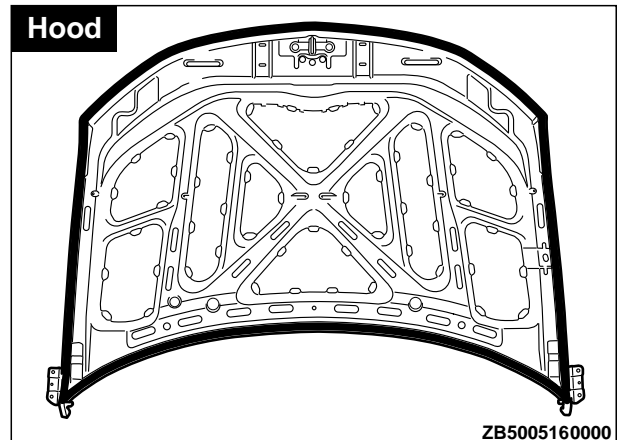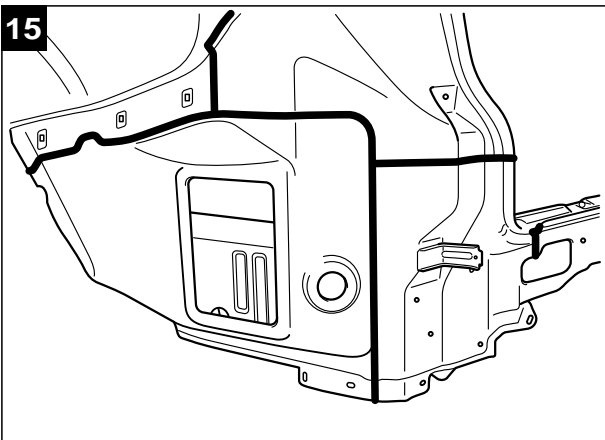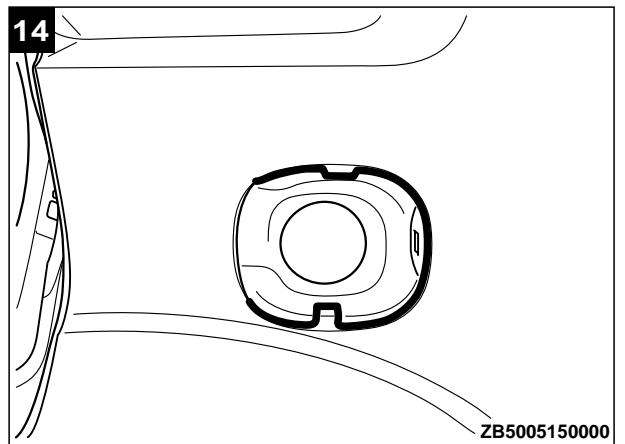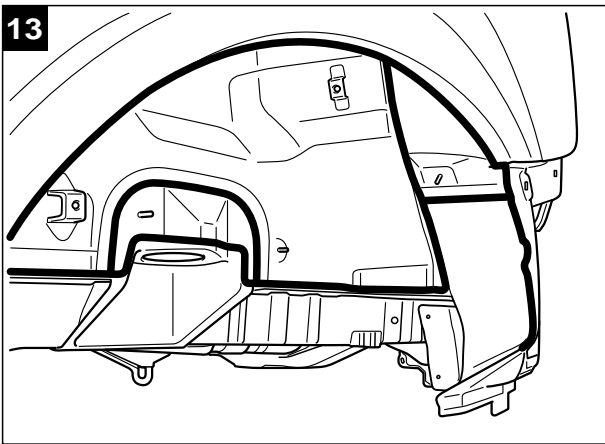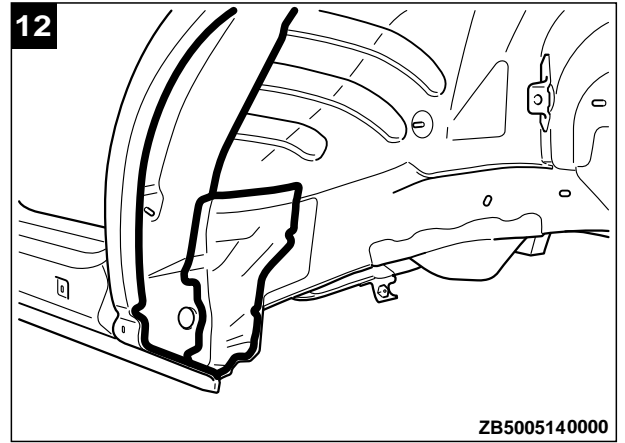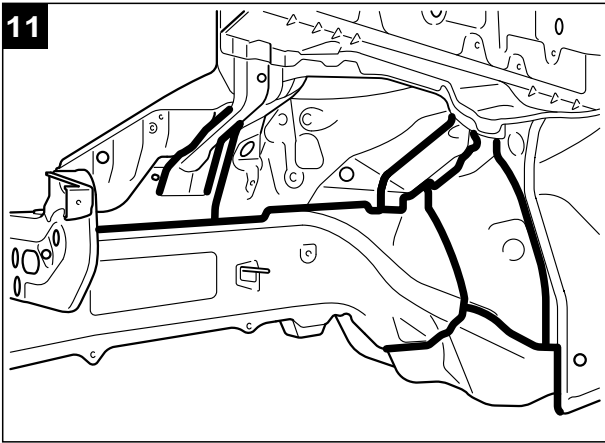


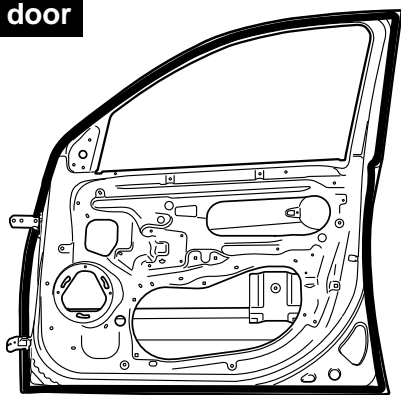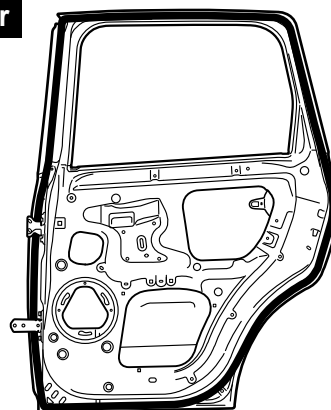Front door**Rear door**

ZB5005170000

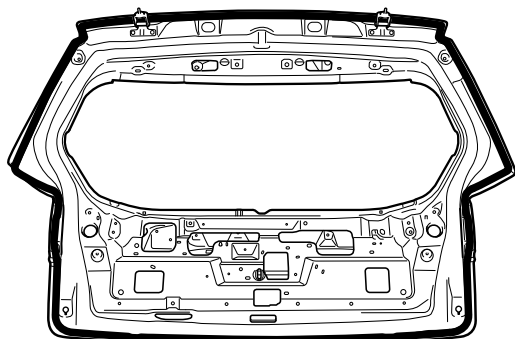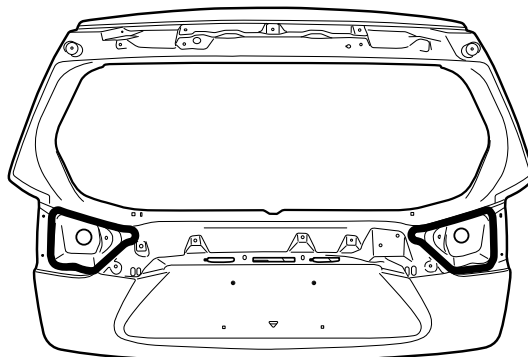Liftgate upper(inner)**Liftgate upper(outer)**

ZB5005180000

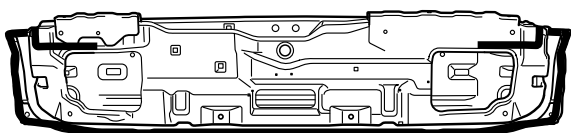Liftgate lower

ZB5005190000


UNDERCOAT APPLICATION LOCATIONS

The under parts of the body is undercoated for anti-corrosive, anti-rust, anti-chipping, and anti-vibration performance.

After correcting the body, restore as shown in the instructions of the figure, if necessary.

M40400000030USA0000010000

Tape the areas marked with an asterisks to protect those areas from getting any undercoating on those areas.

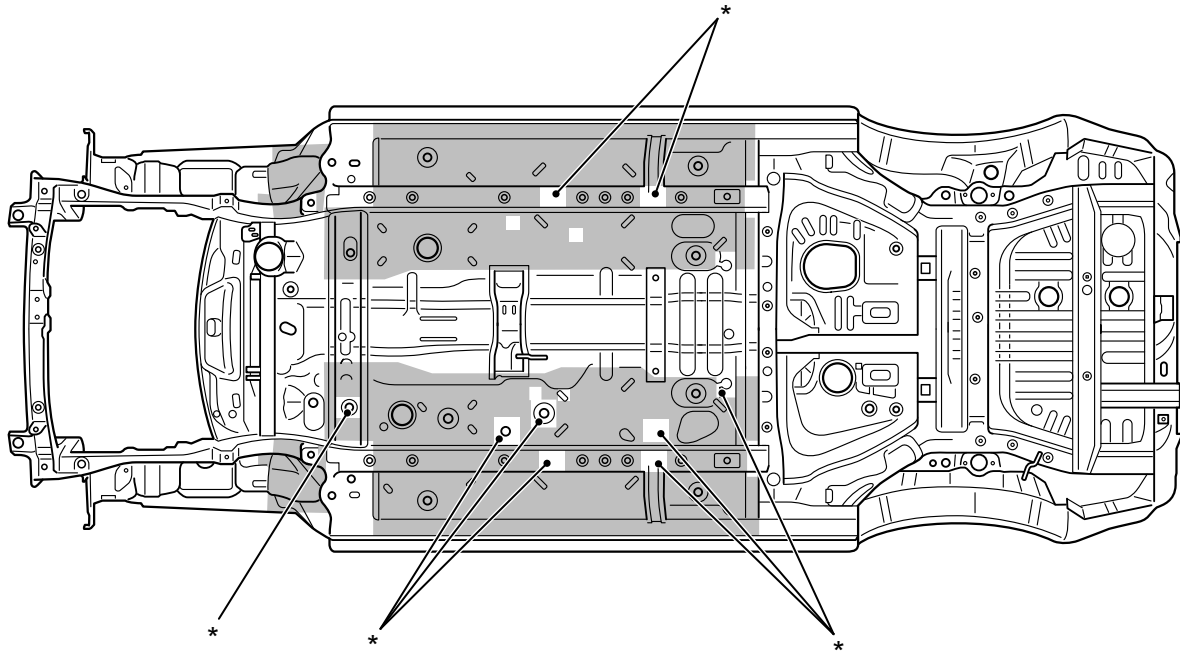

 : Undercoat [Film thickness is at least 0.5 mm]

ZB5003690000

MEMO