
GROUP 00E

GENERAL <ELECTRICAL>

CONTENTS

HOW TO READ WIRING DIAGRAMS	00E-2	HOW TO READ CIRCUIT DIAGRAMS	00E-4
COMPOSITION AND CONTENTS OF WIRING DIAGRAMS.	00E-2	MARKINGS FOR CONNECTOR AND EARTHING	00E-5
HOW TO READ CONFIGURATION DIAGRAMS.	00E-3	WIRE COLOUR CODE	00E-8
		ABBREVIATION SYMBOLS	00E-8

HOW TO READ WIRING DIAGRAMS

COMPOSITION AND CONTENTS OF WIRING DIAGRAMS

M1001012800149

In each section, all specifications are listed, including optional specifications. Accordingly, some specifications may not be applicable for individual vehicles.

Section	Basic contents
Component locations	Locations are shown for each point of relays, ECUs, sensors, solenoid valves, inspection connectors, fusible links, fuses, etc. In the part's lists, parts are listed in alphabetical order.
Configuration diagrams	Connector locations and harness wiring configurations on actual vehicles are illustrated.
Circuit diagrams	<p>Circuits from power source to earth are shown completely, classified according to system. There is a main division into power source circuits and circuits classified by system. The circuits classified by system also include operation and troubleshooting hints.</p> <ul style="list-style-type: none">• Junction block The entire circuit for the junction block is described, because only the part of the junction block needed is normally shown in each circuit diagram.• Joint connectors The internal circuits for all joint connectors are described, because only the part needed is shown in each circuit diagram.• Power source circuits Circuits from the battery to fusible link, fuse, ignition switch, etc are shown.• Circuits classified by system For each system, the circuits are shown from fuse to earth, excluding the power source sections.

HOW TO READ CONFIGURATION DIAGRAMS

M1001006400250

The wiring harness diagrams clearly show the connector locations and harness routings at each site on actual vehicles.

Denotes connector No.

The same connector No. is used throughout the circuit diagrams to facilitate connector location search.

The first alphabetical symbol indicates the location site of the connector and a number that follows is the unique number. Numbers are usually assigned to part in clockwise order on the diagram.

Example: A-19

Number specific to connector (serial number)

Connector location site symbol

A: Engine compartment

B: Engine and transmission

C: Dash panel

D: Floor and roof

E: Door

F: Tailgate

Denotes earth point.

Same earth number is used throughout circuit diagrams to facilitate search of earth point.

Refer to GROUP 70 COMPONENT LOCATIONS - EARTH MOUNTING LOCATIONS for details of earth points.

Denotes harness name.

Denotes a section covered by a corrugated tube.

The mark ★ shows the standard mounting position of wiring harness.

Denotes the colour of the tube (If not specified, it is black).
R: Red
Y: Yellow

The number of connector pins and the connector colour (except milk white)* are shown for ease of retrieval.

Example: (2-B)

Connector colour (milk white if no colour is indicated)

Number of connector pins

*: Typical connector colours

B: Black

Y: Yellow

L: Blue

G: Green

R: Red

BR: Brown

V: Violet

O: Orange

GR: Grey

None: Milk white

A-15 (2)

A-16 (2-GR)

A-17 (2-B)

A-18 (2-B)

A-19 (2-GR)

Fog lamp (RH)

Horn (LO)

Headlamp (RH)

Windshield washer motor


Dual pressure switch

Indicates the device to which the connector is connected.

HOW TO READ CIRCUIT DIAGRAMS


M1001006500194

The circuit of each system from the fuse (or fusible link) to earth is shown. The power source is shown at the top and the earth at the bottom to facilitate understanding of how the current flows. The circuit diagrams show the state when switches are not operated.

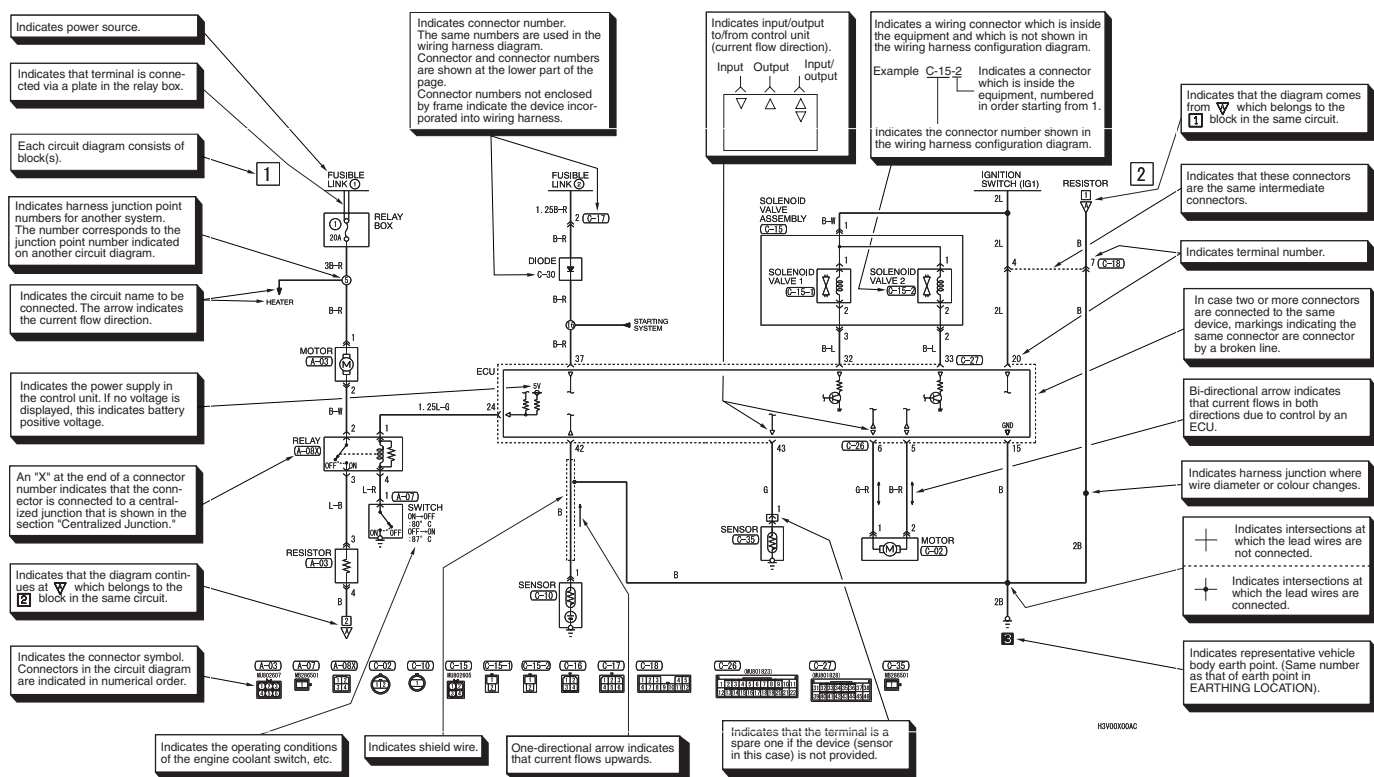


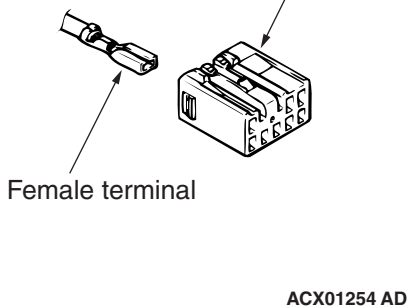


















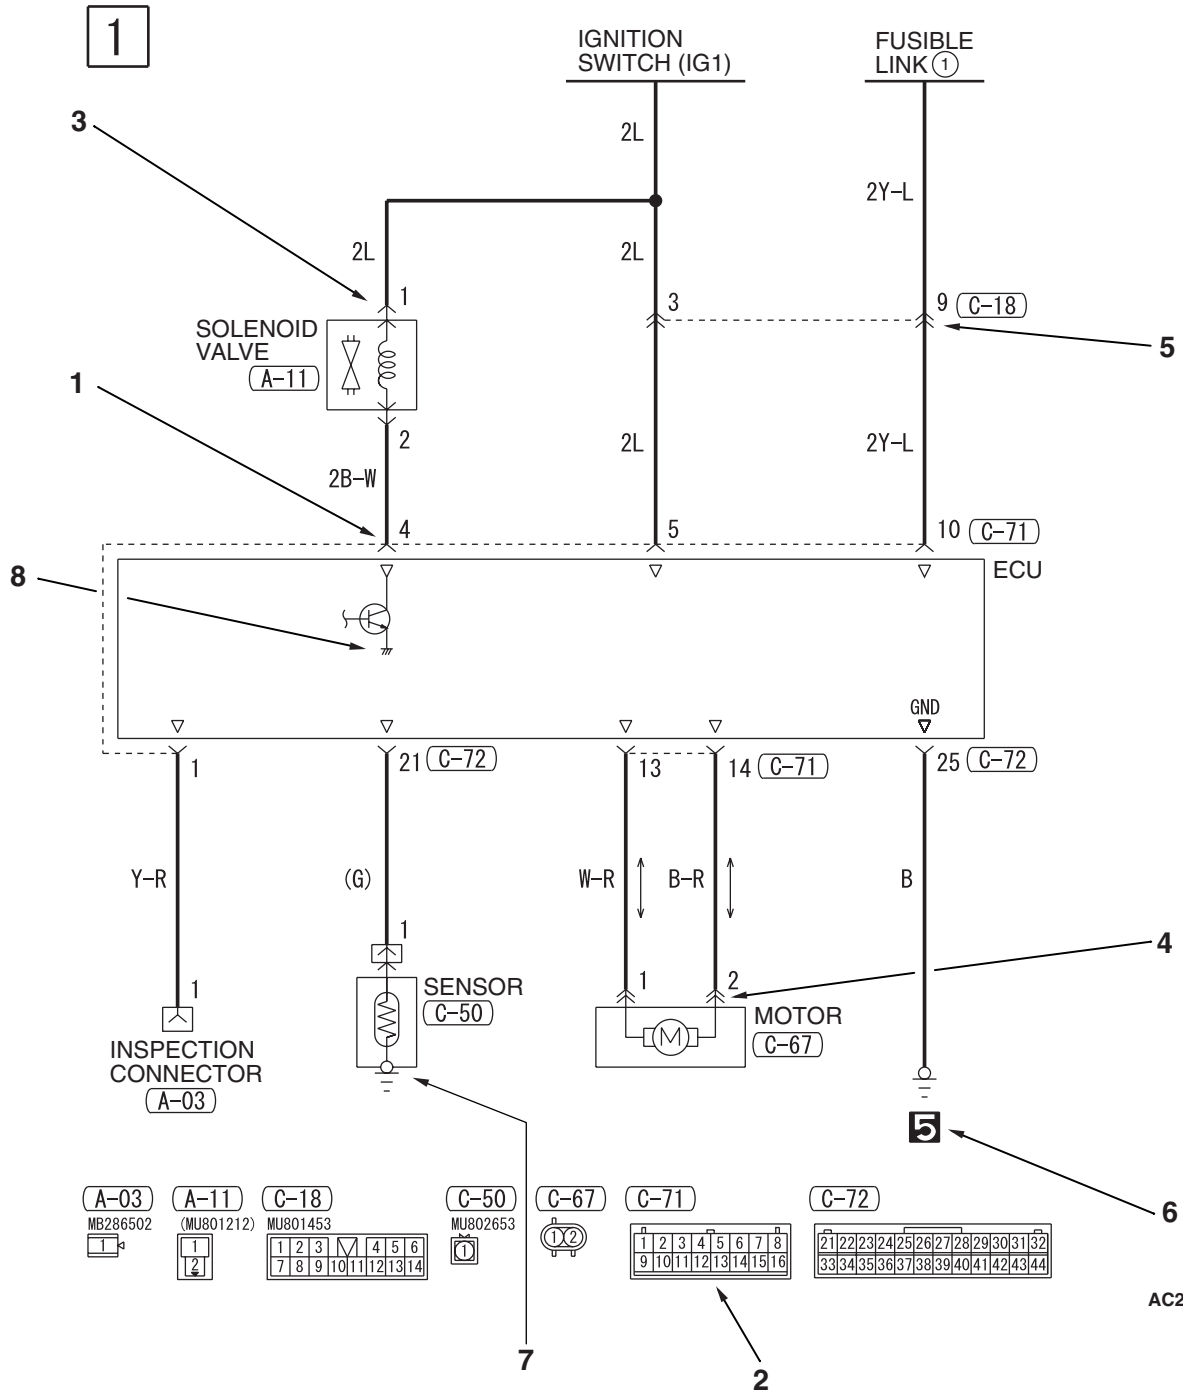


MARKINGS FOR CONNECTOR AND EARTHING

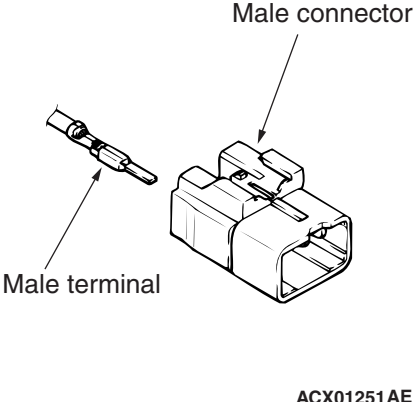M1001007900162



AC208460 AB

Item	No.	Connector/Earthing	Symbol	Contents
Connector and terminal marking	1	<p>Male connector</p>  <p>Male terminal</p> <p>ACX01251 AE</p>	<p>Male terminal</p>  <p>ACX01252 AD</p>	The male and female terminals are indicated as shown. The connector with male terminal(s) is called as male connector and indicated by two connector contour lines, while the connector with female terminal(s) is called as female connector and indicated by single connector contour line.
			<p>Male connector</p>  <p>ACX01253 AI</p>	
		<p>Female connector</p>  <p>Female terminal</p> <p>ACX01254 AD</p>	<p>Female terminal</p>  <p>ACX01255 AD</p>	
			<p>Female connector</p>  <p>ACX01256 AH</p>	
Connector symbol marking	2	<p>Device</p>  <p>ACX01257 AD</p>	 <p>ACX01253</p>	The symbol indicates the connector is viewed as shown. At a device connection, the connector symbol on the device side is shown. For an intermediate connector, the male connector symbol is shown. For spare connectors and check connectors, no device is connected, and so the harness-side connector symbol is shown for these connectors. However, a diagnosis connector is exceptional.
		<p>Intermediate connector</p>  <p>ACX01258 AD</p>		
		<p>Spare connector, check connector</p>  <p>ACX01816 AD</p>	 <p>ACX01256</p>	


Item	No.	Connector/Earthing	Symbol	Contents
Connector connection marking	3	Direct connection type  ACX01260 AD	 ACX01261	Connection between a device and the harness is either by direct insertion in the device (direct connection type) or by connection with a harness connector furnished on the device side (harness connection type). The two types are indicated as illustrated.
	4	Harness connection type  ACX01262 AD	 ACX01263	
	5	Intermediate connector  ACX01264 AD	 ACX01265	
Earth marking	6	Body earth  AC208448 AB	 ACX01274	Earthing is either by body earth, device earth or control unit interior earth. These are indicated as illustrated.
	7	Device earth  AC208449 AB	 ACX01276	
	8	Earth in control unit  AC208450 AB	 ACX01278	

WIRE COLOUR CODE

M1001008000195

Wire colours are identified by the following colour codes.

Code	Wire colour	Code	Wire colour	Code	Wire colour	Code	Wire colour
B	Black	L	Blue	PU	Purple	V	Violet
BR	Brown	LG	Light green	R	Red	W	White
G	Green	O	Orange	SB	Sky blue	Y	Yellow
GR	Grey	P	Pink	SI	Silver	—	—

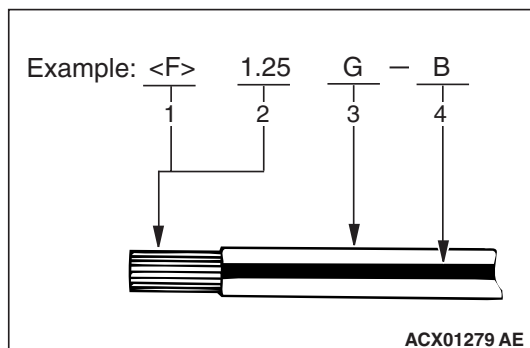

If a cable has two colours, the first of the two colour code characters indicates the basic colour (colour of the cable coating) and the second indicates the marking colour.

No.	Meaning
1	<F>: Flexible wire <T>: Twisted wire
2	Wire size (mm ²)*
3	Basic colour (colour of the cable coating)
4	Marking colour

NOTE:

*: No code indicates 0.5 mm². Cable colour code in parentheses indicates 0.3 mm².

ABBREVIATION SYMBOLS

M1001008100200

The abbreviation symbols used in wiring diagrams are defined below.

1. FOR SYSTEM NAME

Abbreviation symbol	Meaning	Abbreviation symbol	Meaning
A/C	Air conditioner	INVECS-II	Intelligent and innovative vehicles electronic control system
A/T	Automatic transmission	M/T	Manual transmission
ABS	Anti-skid braking system	SRS	Supplemental restraint system

2. FOR COMBINATION METER

Abbreviation symbol	Meaning	Abbreviation symbol	Meaning
ABS	Anti-skid braking system warning lamp	ODO	Odometer
BEAM	High beam indicator lamp	OIL	Oil pressure warning lamp
BRAKE	Brake warning lamp	P.R.N.D	Selector lever position indicator lamp
CHECK ENGINE	Check engine warning lamp	SPEED	Speedometer
CHG	Charging warning lamp	SRS	Supplemental restraint system warning lamp

Abbreviation symbol	Meaning	Abbreviation symbol	Meaning
CLEARANCE	Position lamp indicator lamp	T/GA	Engine coolant temperature gauge
DOOR	Door-ajar warning lamp	TACHO	Tachometer
F/GA	Fuel gauge	TRIP	Tripmeter
FOG	Fog lamp indicator lamp	TURN (LH)	Turn signal indicator lamp, hazard indicator lamp
FUEL	Low fuel warning lamp	TURN (RH)	
LCD	Liquid crystal display		

3. FOR SWITCHES AND RELAYS

Name of switches and relays	Abbreviation symbol	Operation
Blower switch	LO	Blower operates at low speed
	ML	Blower operates at medium low speed
	MH	Blower operates at medium high speed
	HI	Blower operates at high speed
Dimmer passing switch	LO	Low beams ON
	HI	High beams ON
	PASS	High beams ON
Door lock actuator	LOCK	Door lock
	UNLOCK	Door unlock
Front room lamp, rear room lamp	DOOR	Room lamp or personal lamp ON when a door is open
Ignition switch	LOCK	When turned to the LOCK position, no circuits will start
	ACC	When turned to the ACC (ACCESSORY) or ON position, the power circuit will start
	IG2	When at the ST (START) position, the power circuit will not start functioning
	IG1	Even when at the ST (START) position, the power circuit will start
	ST	Only when turned to the ST (START) position, the power circuit will start
Inhibitor switch	P	Selector lever is at the P (PARKING) position
	R	Shift lever is at the R (REVERSE) position
	N	Shift lever is at the N (NEUTRAL) position
	D	Shift lever is at the D (DRIVE) position
Lighting switch	TAIL	Position, tail, licence plate and illumination lamps ON
	HEAD	Headlamps ON
Others	ON	Switched ON
	OFF	Switched OFF

Name of switches and relays	Abbreviation symbol	Operation
Power window switch	UP	Window closes
	DOWN	Window opens
	AUTO UP	Window easily closes with one action
	AUTO DOWN	Window easily opens with one action
	LOCK	Prevents all switches other than the main switch from operating the power windows
	UNLOCK	Every switch can open or close the respective window
Remote controlled mirror switch	LH	LH mirror operates
	RH	RH mirror operates
Shift switch assembly	AUTO MODE	Shift changes occur automatically in D (DRIVE) position
	SPORTS MODE	Manual shift changes between 1st and 4th (4A/T) or 5th (5A/T) are possible
	UP	Upshifting occurs one gear at a time
	DOWN	Downshifting occurs one gear at a time
Sunroof switch	OPEN	Sunroof slides to open
	UP	Sunroof tilts up
	CLOSE/DOWN	Sunroof tilts down or slides to close
Switch and relay	OFF	Switched OFF
	ON	Switched ON
Turn signal switch	LH	LH turn signal lamps ON
	RH	RH turn signal lamps ON
Variable intermittent wiper control switch	SLOW	Lengthen pause time for intermittent operation
	FAST	Shorten pause time for intermittent operation
Windshield wiper switch or rear wiper switch	MIST	Wiper operates once
	INT	Wiper operates intermittently
	LO	Wiper operates at low speed
	HI	Wiper operates at high speed

4. FOR OTHERS

Abbreviation symbol	Meaning	Abbreviation symbol	Meaning
CPU	Central processing unit	ILL	Illumination lamp
ECU	Electronic control unit	J/B	Junction block
EGR	Exhaust gas recirculation	J/C	Joint connector
ETACS	Electronic time and alarm control system	LH	Left hand
GND	Earth	LO	Low
HI	High	RH	Right hand
IC	Integrated circuit		