


## GENERAL INFORMATION

The parking brake is of a mechanical rear-wheel brake construction employing a drum in disc-type parking brake mechanism.

The operation method utilises a parking brake lever which is in an offset position at the driver's side.

## CONSTRUCTION DIAGRAM

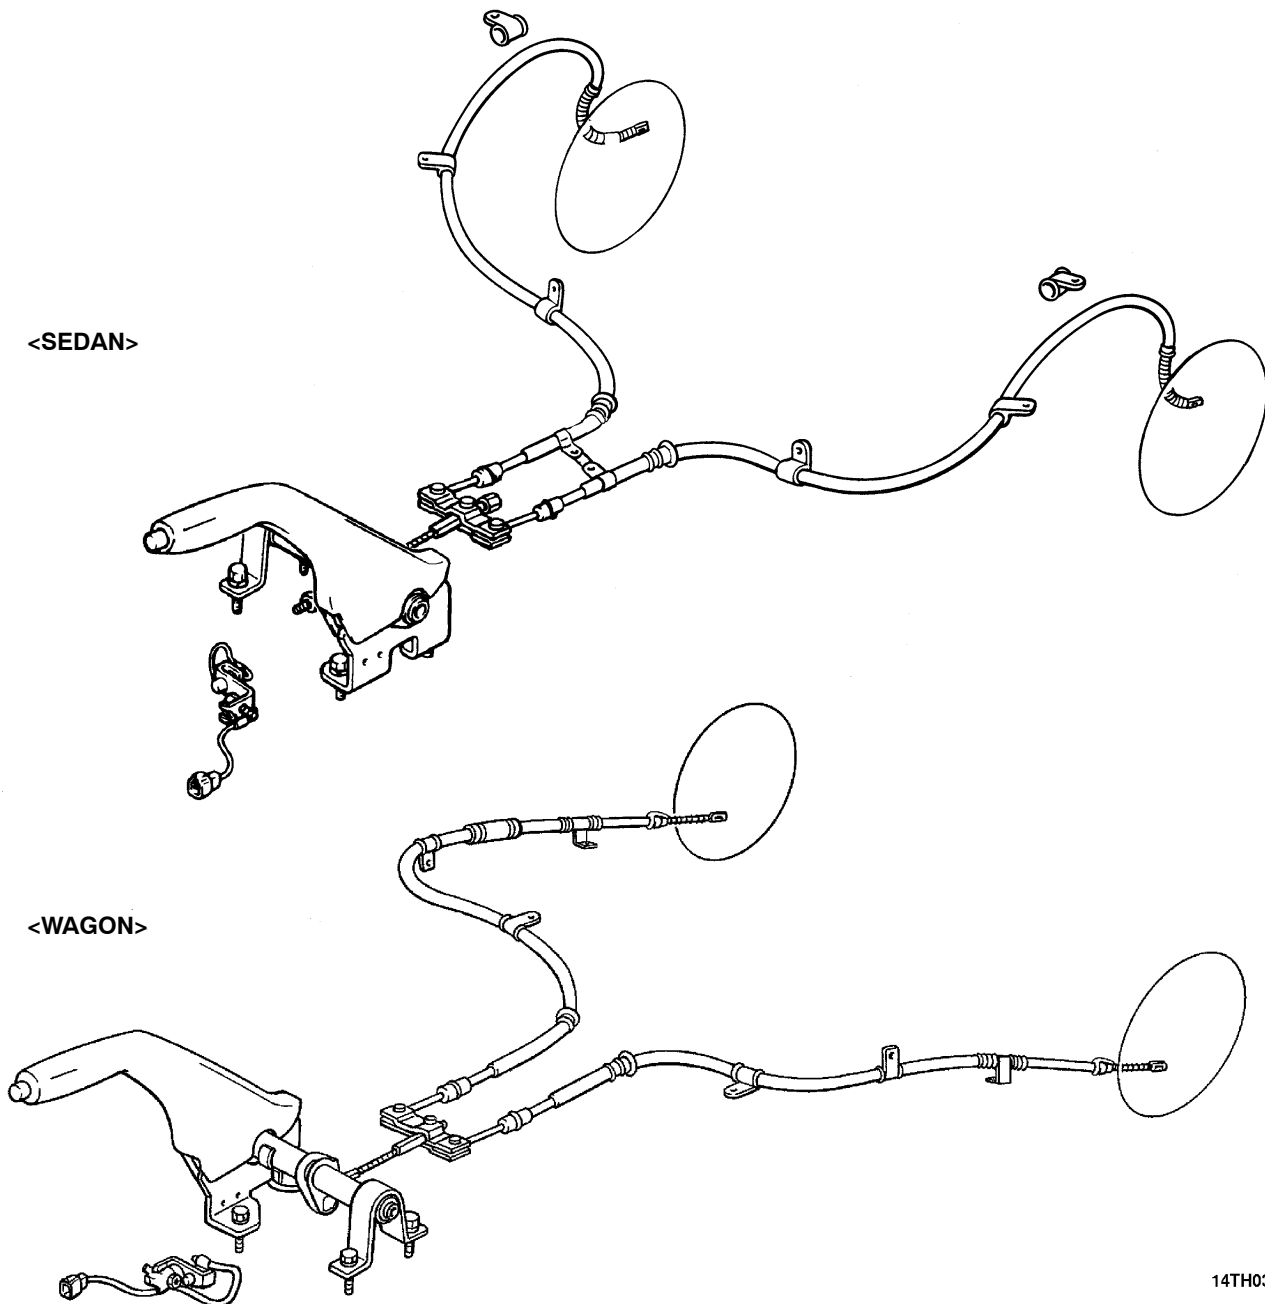

14TH039A

**SERVICE SPECIFICATIONS**

Item	Standard value	Limit
Parking brake lever stroke	3-5 notches	-
Brake lining thickness mm	2.8	1.0
Brake drum inside diameter mm	168	169

**LUBRICANTS**

Items	Specified lubricants
Shoe and lining assembly and adjuster contact surfaces	Brake grease SAE J310, NLGI No. 1
Adjuster	

## ON-VEHICLE SERVICE

## PARKING BRAKE LEVER STROKE CHECK

1. Pull the parking brake lever with a force of approx. 200 N and count the number of notches.

**Caution**

The 200 N force of the parking brake lever must be strictly observed.

**Standard value: 3-5 notches**

2. If the parking brake lever stroke is not the standard value, adjust as described below.




- (1) Remove the inner compartment of the floor console.
- (2) Loosen the parking brake cable adjusting nut to the end of the cable rod, to allow slack in the cables.

- (3) Jack up the rear of the vehicle and support on jack stands and remove the rear wheels.
- (4) Temporarily install the wheel nuts so that the back of the nuts contact the brake disc and hold the disc in position.
- (5) Remove the brake shoe adjustment hole plug, and insert a flat blade screwdriver to turn the adjuster wheel (to expand the shoe) sufficiently to prevent the disc rotating.
- (6) Rotate the adjuster wheel 5 notches in the reverse direction to allow the disc to rotate freely. Carry out this operation on both sides.
- (7) Remove the temporarily installed wheel nuts and install the rear wheels.
- (8) Tighten the parking brake cable adjusting nut inside the vehicle to achieve a 3-5 notch stroke of the parking brake lever at the specified lever force.

**Caution**

If the number of brake lever notches engaged is less than the standard value, the cable has been over adjusted. Be sure to adjust it to within the standard value.

- (9) After completing the adjustment, check to be sure that there is no play between the adjusting nut and the pin. Also check that the adjusting nut is securely held by the nut holder.
- (10) With the parking brake lever in the released position, turn the rear wheels to confirm that the rear brakes are not dragging.
- (11) Remove the jack stands and lower the vehicle to the floor. Retorque the wheel nuts to the specified torque.

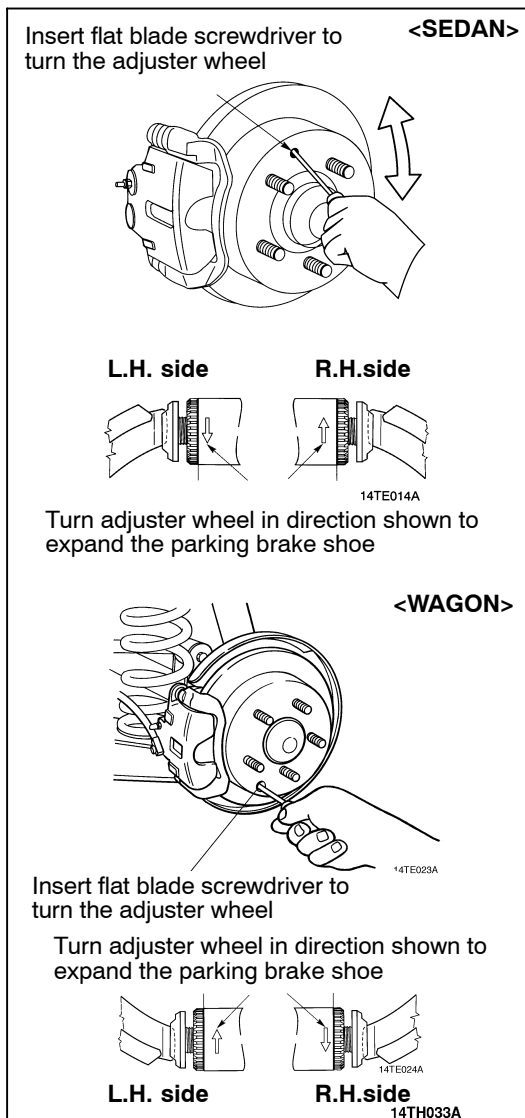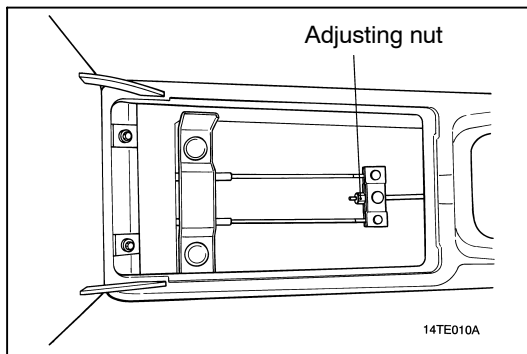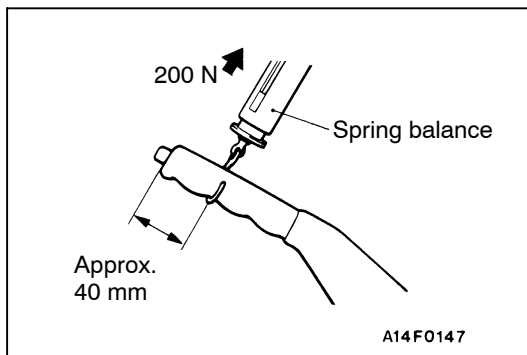

## LINING RUNNING-IN



The parking brakes must always be run – in using the following procedure when the parking brake linings or brake disc rotors have been replaced; if the brake drum has been machined or when parking brake performance is insufficient.

1. Adjust the parking brake stroke to the specified value.
2. Hook a spring scale onto the centre of the parking brake lever grip and pull it with a force of 50 N in a direction perpendicular to the handle.
3. Drive the vehicle in a forward direction at a constant speed of 30 km/h for 50 m.
4. Release the parking brake and let the brakes cool for 5 to 10 minutes.
5. Repeat the procedure in steps (2) to (4) 4-5 times.
6. Repeat step (2) and drive the vehicle at 5 km/h in the reverse direction for 50 m.
7. Repeat this operation twice, allowing the brakes to cool for 5 to 10 minutes between each operation.

8. Confirm the parking brake is working correctly by parking the vehicle in a large open area (at least 10 m from any obstacles) and apply the parking brake lever with a force of 400 N. It should be possible to stall the engine in both the forward and reverse directions in low gear without the vehicle moving.


### Caution

1. **Care must be exercised when undertaking this test. The driver must be ready to apply the footbrake in case of emergency.**
2. **The above test should only be conducted once in the forward and once in the reverse direction.**
3. **The vehicle transmission should never be stalled for more than 3 seconds, as damage to the transmission may result.**

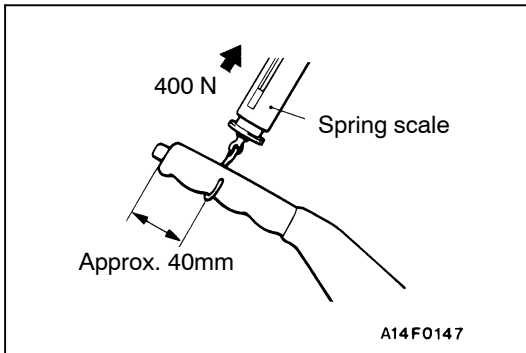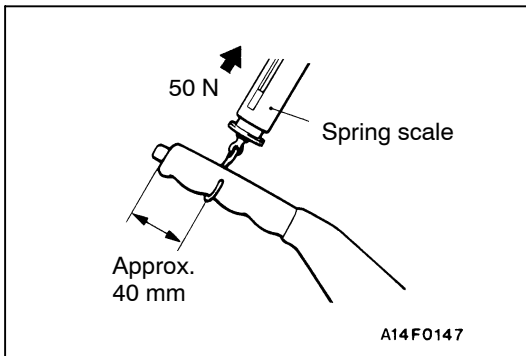


### REPLACING DUST BOOT

1. Remove the backing plate, refer [On vehicle service](#).
2. Drill out the rivet of the dust boot retaining bracket.
3. Remove the old dust boot.

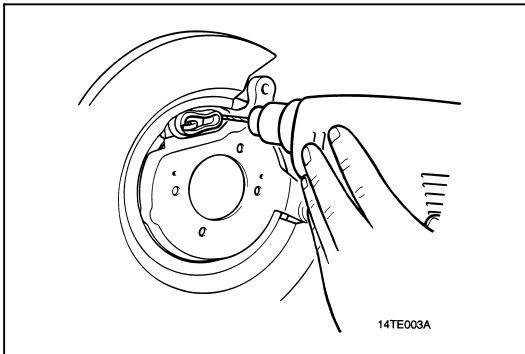


4. Install the new dust boot onto the backing plate.
5. Place the dust boot retaining bracket onto the backing plate.
6. Re-rivet the dust boot retaining bracket onto the backing plate.

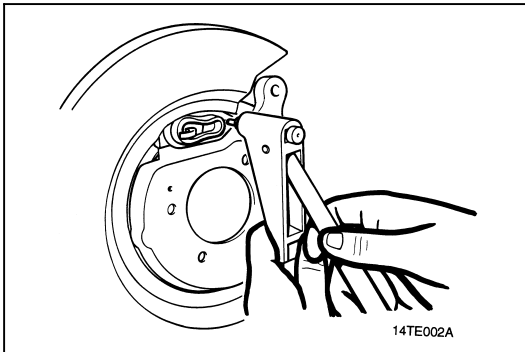

### PARKING BRAKE SWITCH CHECK

1. Disconnect the connector of the parking brake switch and connect an ohmmeter between the parking brake switch and the installation bolt.
2. The parking brake switch is serviceable if there is continuity when the parking brake lever is raised and if there is no continuity when it is returned.

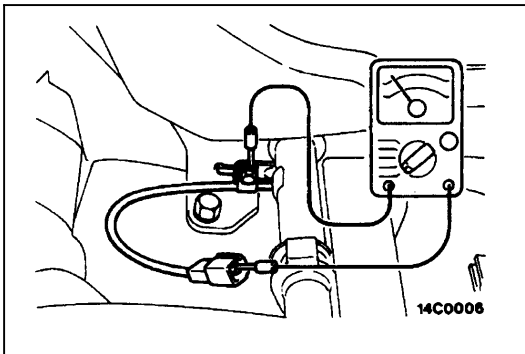

# PARKING BRAKE LEVER

## REMOVAL AND INSTALLATION

### Pre-removal Operation




Floor Console Removal  
(Refer [On vehicle service.](#))

### CAUTION: SRS

1. When removing and installing the floor console, do not let it bump against the SRS-ECU or other components.
2. Before removal of SRS-ECU, refer [Group 52B - SRS-ECU.](#)

### Post-installation Operation

- Parking Brake Lever Stroke Adjustment  
(Refer [On vehicle service.](#))
- Floor Console Installation  
(Refer [On vehicle service.](#))

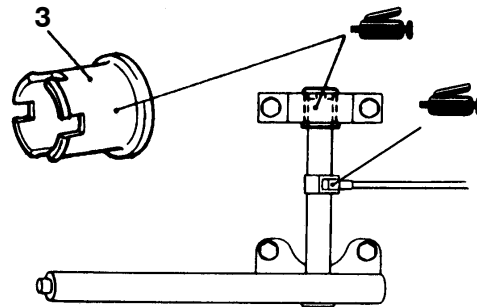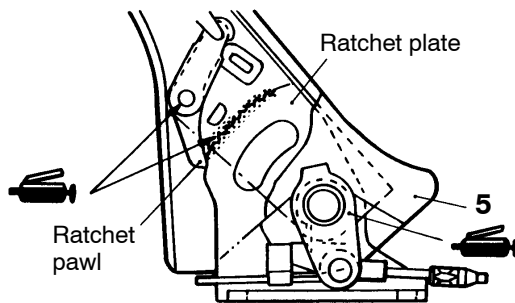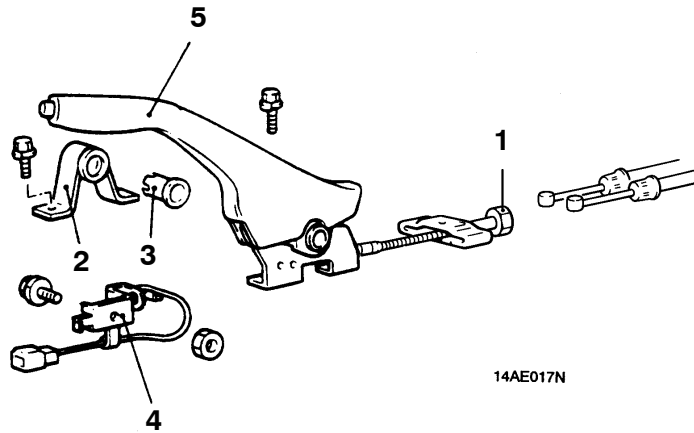

14AE016N

14AE015N

### Removal steps

1. Adjusting nut
2. Parking brake stay
3. Bushing
4. Parking brake switch
5. Parking brake lever

# PARKING BRAKE CABLE

## REMOVAL AND INSTALLATION

### Pre-removal Operation

- Floor Console Removal  
(Refer [On vehicle service.](#))


### CAUTION: SRS

1. When removing and installing the floor console, do not let it bump against the SRS-ECU or other components.
2. Before removal of SRS-ECU, refer [Group 52B - SRS-ECU.](#)


### Post-installation Operation

- Parking Brake Lever Stroke Adjustment  
(Refer [On vehicle service.](#))
- Floor Console Installation  
(Refer [On vehicle service.](#))

<SEDAN>

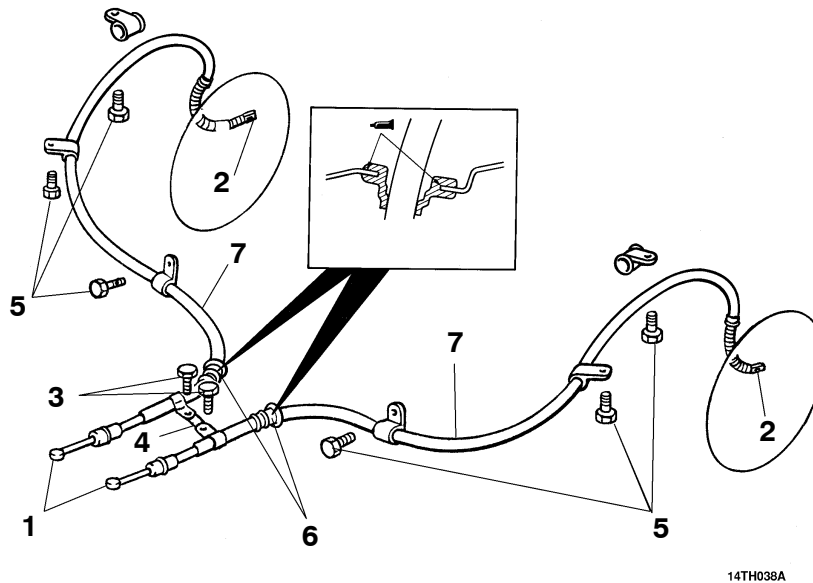


<WAGON>

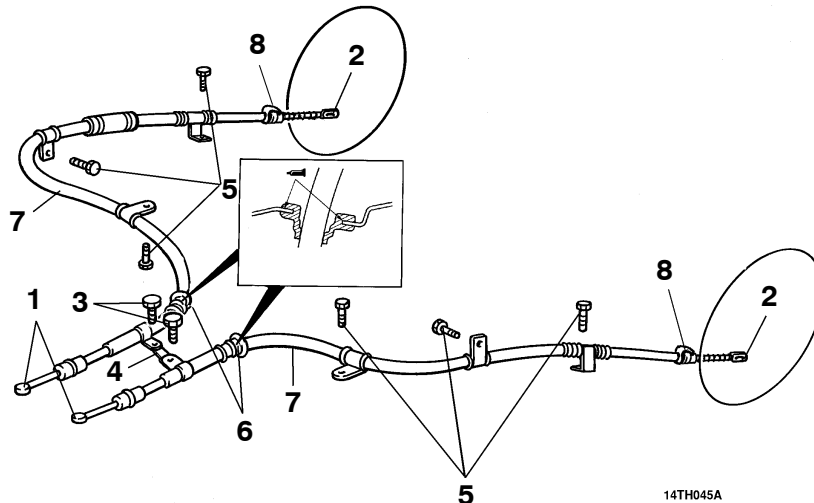

### Removal steps

1. Park brake cable trunnion
2. Park brake cable actuator lever eyelet
3. Interior park brake cable retaining clamp bolts
4. Interior park brake cable retaining clamp
5. Exterior park brake cable clamp bolts
6. Grommets
7. Cables
8. Retaining clip




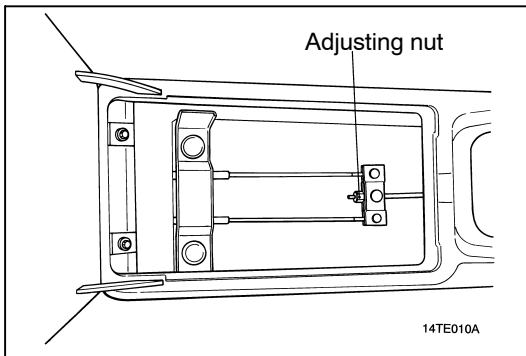


### REMOVAL SERVICE POINTS

#### ◀A▶ PARK BRAKE CABLE TRUNNION

1. Loosen the park brake cable adjusting nut to the end of the cable rod as shown in the illustration.

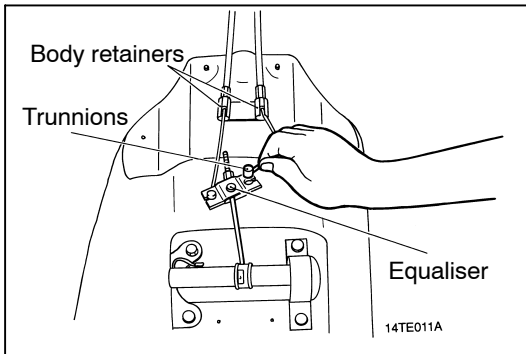

2. Unclip the park brake cable trunnions from the equaliser and remove the cable from the body retainers.

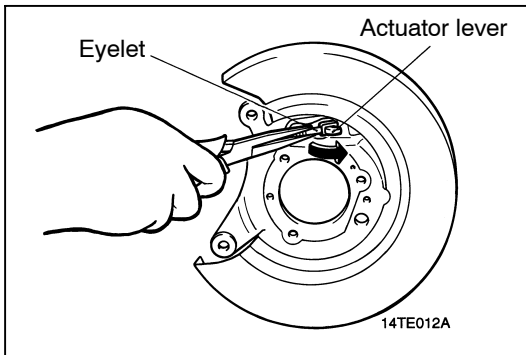

#### ◀B▶ PARK BRAKE CABLE ACTUATOR LEVER EYELET

1. Push the cable towards the rear of the vehicle to release the park brake cable eyelet from the actuator lever.



# PARKING BRAKE

## REMOVAL AND INSTALLATION

### Post-installation Operation


- Parking Brake Lever Stroke Check  
(Refer [On vehicle service.](#))

Main  
Index

36  
Index

36  
Brake

&lt;SEDAN&gt;

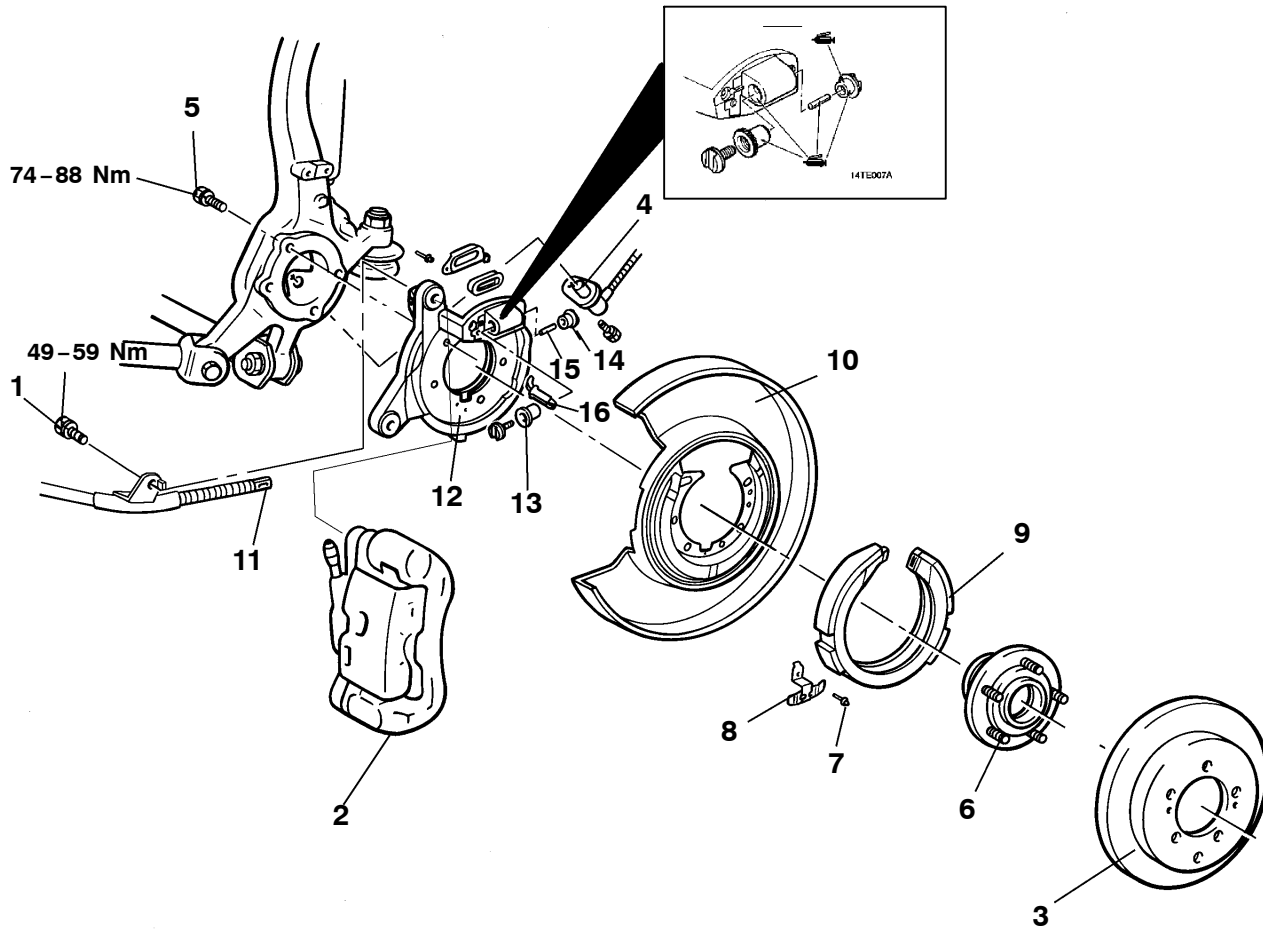

14TH047A

Brake grease: SAE J310, NLGI No. 1

### Removal steps

- |         |                                     |   |
|---------|-------------------------------------|---|
| ◀A▶     | 1. Calliper attaching bolts         | 10. Splash shield                           |
| ◀B▶     | 2. Calliper                         | 11. Parking brake cable to lever connection |
| ◀C▶ ▶C▶ | 3. Disc                             | 12. Backing plate                           |
| ◀C▶ ▶C▶ | 4. Speed sensor <Vehicles with ABS> | 13. Adjuster star wheel                     |
| ◀C▶ ▶C▶ | 5. Hub retaining bolts              | 14. Tappet                                  |
|         | 6. Hub                              | 15. Pushrod                                 |
|         | 7. Shoe hold down spring screw      | ◀D▶ ▶B▶ ▶A▶                                 |
|         | 8. Shoe hold down spring            | 16. Lever                                   |
|         | 9. Shoe                             |   |


# PARKING BRAKE

## REMOVAL AND INSTALLATION

### Post-installation Operation

- Parking Brake Lever Stroke Check  
(Refer [On vehicle service.](#))

<WAGON>

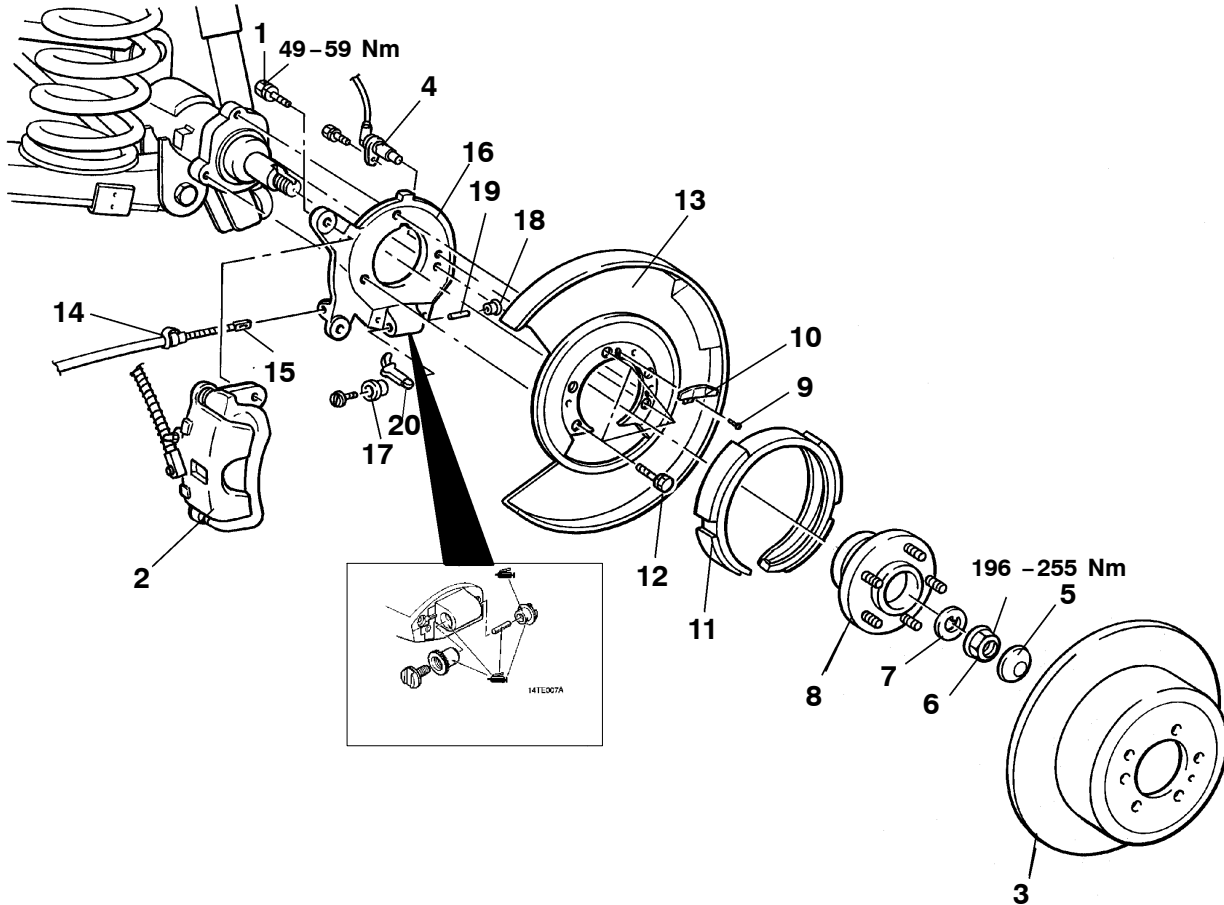


14TH046A

Brake grease: SAE J310, NLGI No. 1

### Removal steps

- |  |   |   |
|--|---|---|
| <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">A</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">B</div> <div style="border: 1px solid black; padding: 2px; margin-bottom: 2px;">C</div> </div> <div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: black; margin-right: 5px;"></div> <div style="width: 10px; height: 10px; background-color: blue; margin-right: 5px;"></div> <div style="width: 10px; height: 10px; background-color: black; margin-right: 5px;"></div> <div style="width: 10px; height: 10px; background-color: blue; margin-right: 5px;"></div> </div> </div> | <ol style="list-style-type: none"> <li>1. Calliper attaching bolts</li> <li>2. Calliper</li> <li>3. Disc</li> <li>4. Speed sensor &lt;Vehicles with ABS&gt;</li> <li>5. Dust cap</li> <li>6. Nut</li> <li>7. Washer</li> <li>8. Hub</li> <li>9. Shoe hold down spring screw</li> <li>10. Shoe hold down spring</li> <li>11. Shoe</li> </ol> | <ol style="list-style-type: none"> <li>12. Splash shield retaining bolts</li> <li>13. Splash shield</li> <li>14. Retaining clip</li> <li>15. Parking brake cable to lever connection</li> <li>16. Backing plate</li> <li>17. Adjuster star wheel</li> <li>18. Tappet</li> <li>19. Pushrod</li> <li>20. Lever</li> </ol> |
|--|---|---|

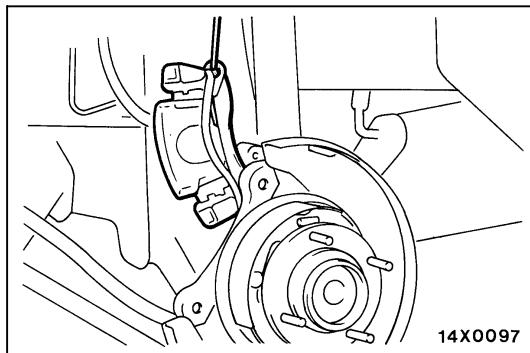

## REMOVAL SERVICE POINTS

### ◀A▶ CALLIPER

1. Support the removed calliper with wire to a nearby part to avoid placing stress on the flexible brake hose.

### ◀B▶ BRAKE DISC

1. If removal of the brake disc is difficult, release the shoe adjuster star wheel to a point where the brake disc is able to be removed by rotating the disc and pulling gently.

#### Caution

If excessive force is applied to the brake disc, the shoe hold down clip will be damaged.

### ◀C▶ HUB/SPEED SENSOR

1. Ensure no damage is caused to the ABS rotor or speed sensor by striking them against each other or other components.


### ◀D▶ LEVER

#### NOTE

Care must be taken when pulling the lever through the boot as damage may result.



Insert flat blade screwdriver to turn the adjuster wheel

<SEDAN>



L.H. side


R.H. side



14TE014A



Turn adjuster wheel in direction shown to expand the parking brake shoe

<WAGON>



Insert flat blade screwdriver to turn the adjuster wheel

Turn adjuster wheel in direction shown to expand the parking brake shoe



L.H. side


R.H. side

14TE024A  
14TH033A

## INSTALLATION SERVICE POINTS

### ►A◄ LEVER

1. When inserting the lever through the boot, take care not to damage the boot.

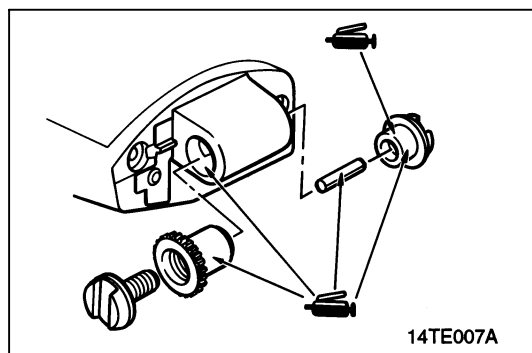


### ►B◄ PUSHROD/TAPPET

1. Pack the inside of the tappet with grease to hold the pushrod during assembly.

### ►C◄ HUB/SPEED SENSOR

1. Ensure no damage is caused to the ABS rotor or speed sensor by striking them against each other or other components.

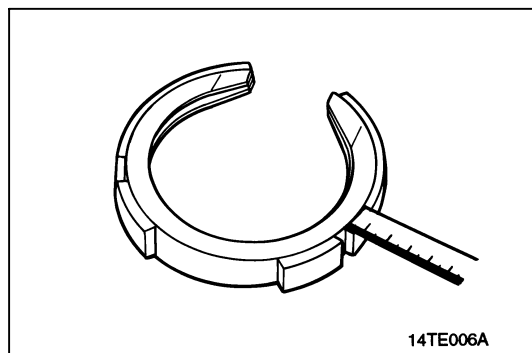

## INSPECTION


- Clean the backing plate, boot and actuation components.

### Caution

1. **Do not clean the shoe, only brush off the brake dust.**
  2. **Only use soap and water to wash the boot as solvents may damage the rubber.**
- Measure the brake lining thickness in at least three locations on each side of the shoe. Replace the shoe if less than the limit value of lining exists or if the lining is worn unevenly.

**Standard value: 2.8mm**

**Limit (maximum): 1.5mm**

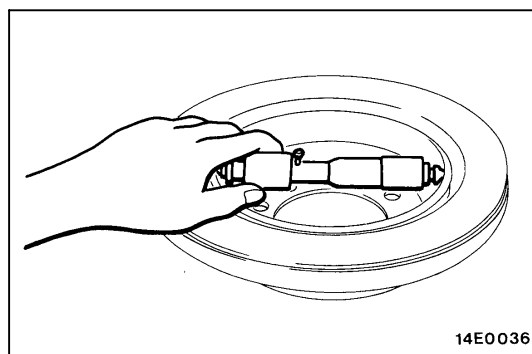

- Using an inside micrometer measure the brake disc inner diameter in two or more locations. Replace the rotor if the inside diameter exceeds the limit value.

**Standard value: 168mm**

**Limit (maximum): 169mm**

- Inspect the actuation components for wear or cracking.
- Check the shoe for cracks.